

3940.01 AM/ FM, DAB, DAB+ passiv

Flex-Dachantenne


Dachantenne mit folgenden Eigenschaften:

- geringe Aufbauhöhe durch Einsatz eines Kurzstabes
- Stabneigung von -10° ... 115° einstellbar
- geringer Montageaufwand
- Verwendbar mit **4723.01** (Verstärker) und **4724.01** (Rundfunkverteiler für die Aufteilung FM/ DAB+ Frequenzen) oder **4721.01** (Verstärker AM/ FM/ DAB, DAB+)

Flex-Roof Mount Antenna

A roof mount antenna with the following specifications:

- Low height by using a short rod
- Whip angle adjustable from 10° ... 115°
- Easy to install
- Usable with **4723.01** (amplifier) and **4724.01** (Radio splitter for the division of FM/ DAB+ frequencies) or **4721.01** (amplifier AM/ FM /DAB, DAB+)

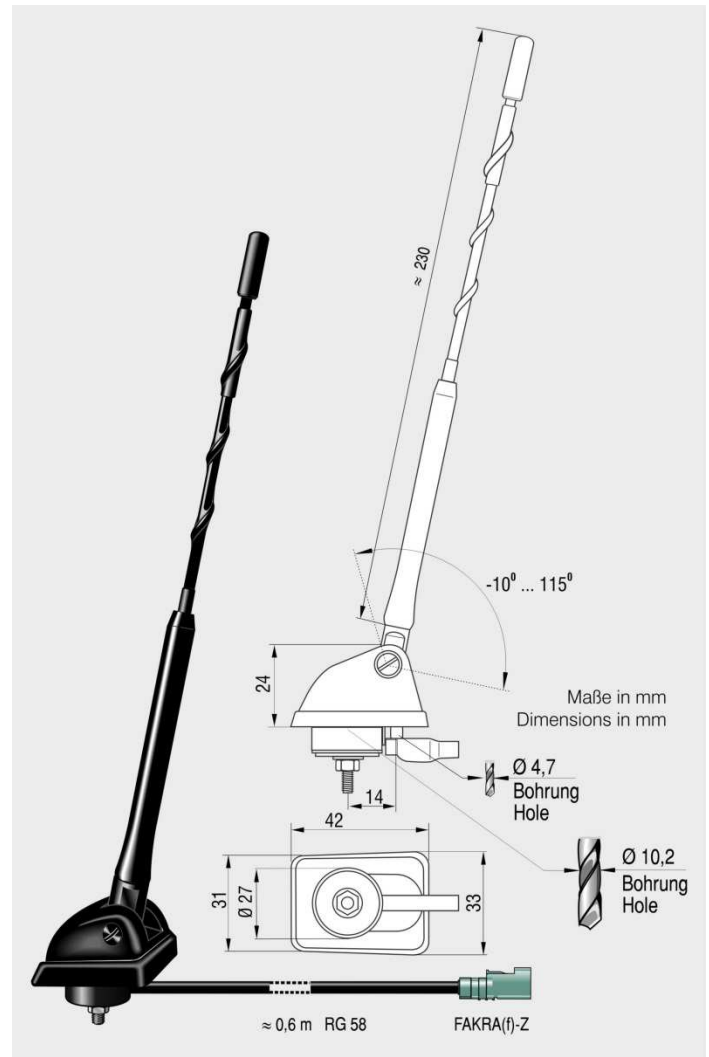

Frequenzbereich	Frequency Range	AM/LMK	FM/ UKW	B III	L-Band
Frequenz	Frequency	0,15-16 MHz	87,5-108 MHz	174-240 MHz	1452-1492 MHz
Gewinn	Gain		-2 dBi *	0 dBi *	2 dBi
Impedanz	Impedance	≤ 10 pF	50 Ω		
Anpassung	VSWR		≤ 2,0 : 1 *		
Kabel RG 174	Cable RG 174	600 mm			
Steckverbinder	Connector	FAKRA (f)-Z			

* Bandmitte/ Center of the band